
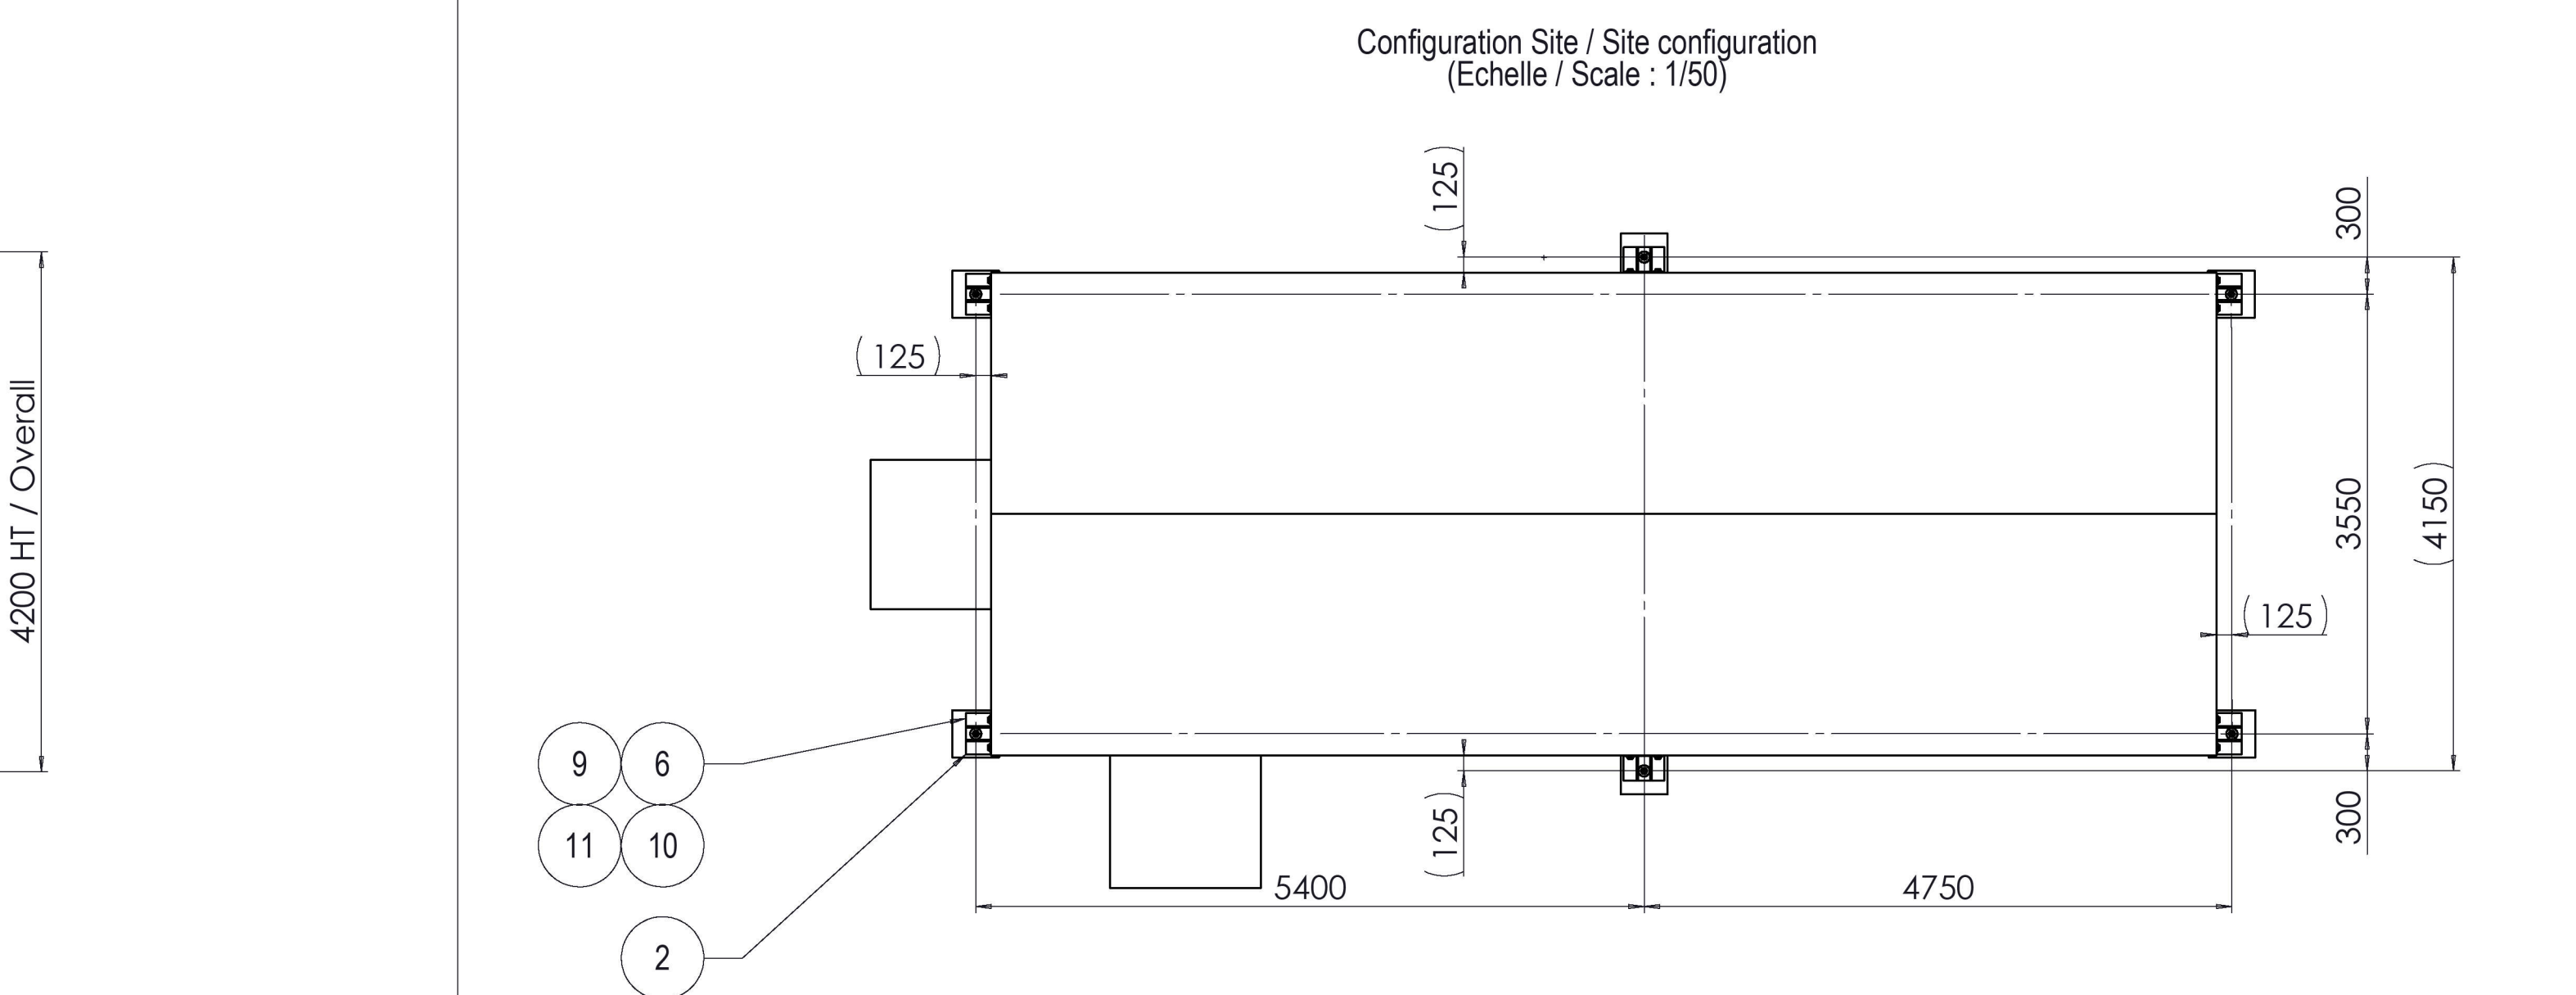
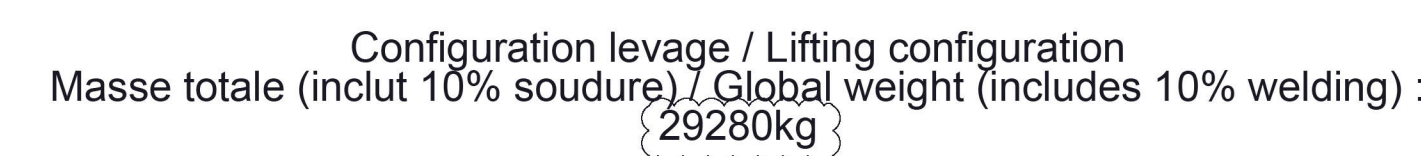


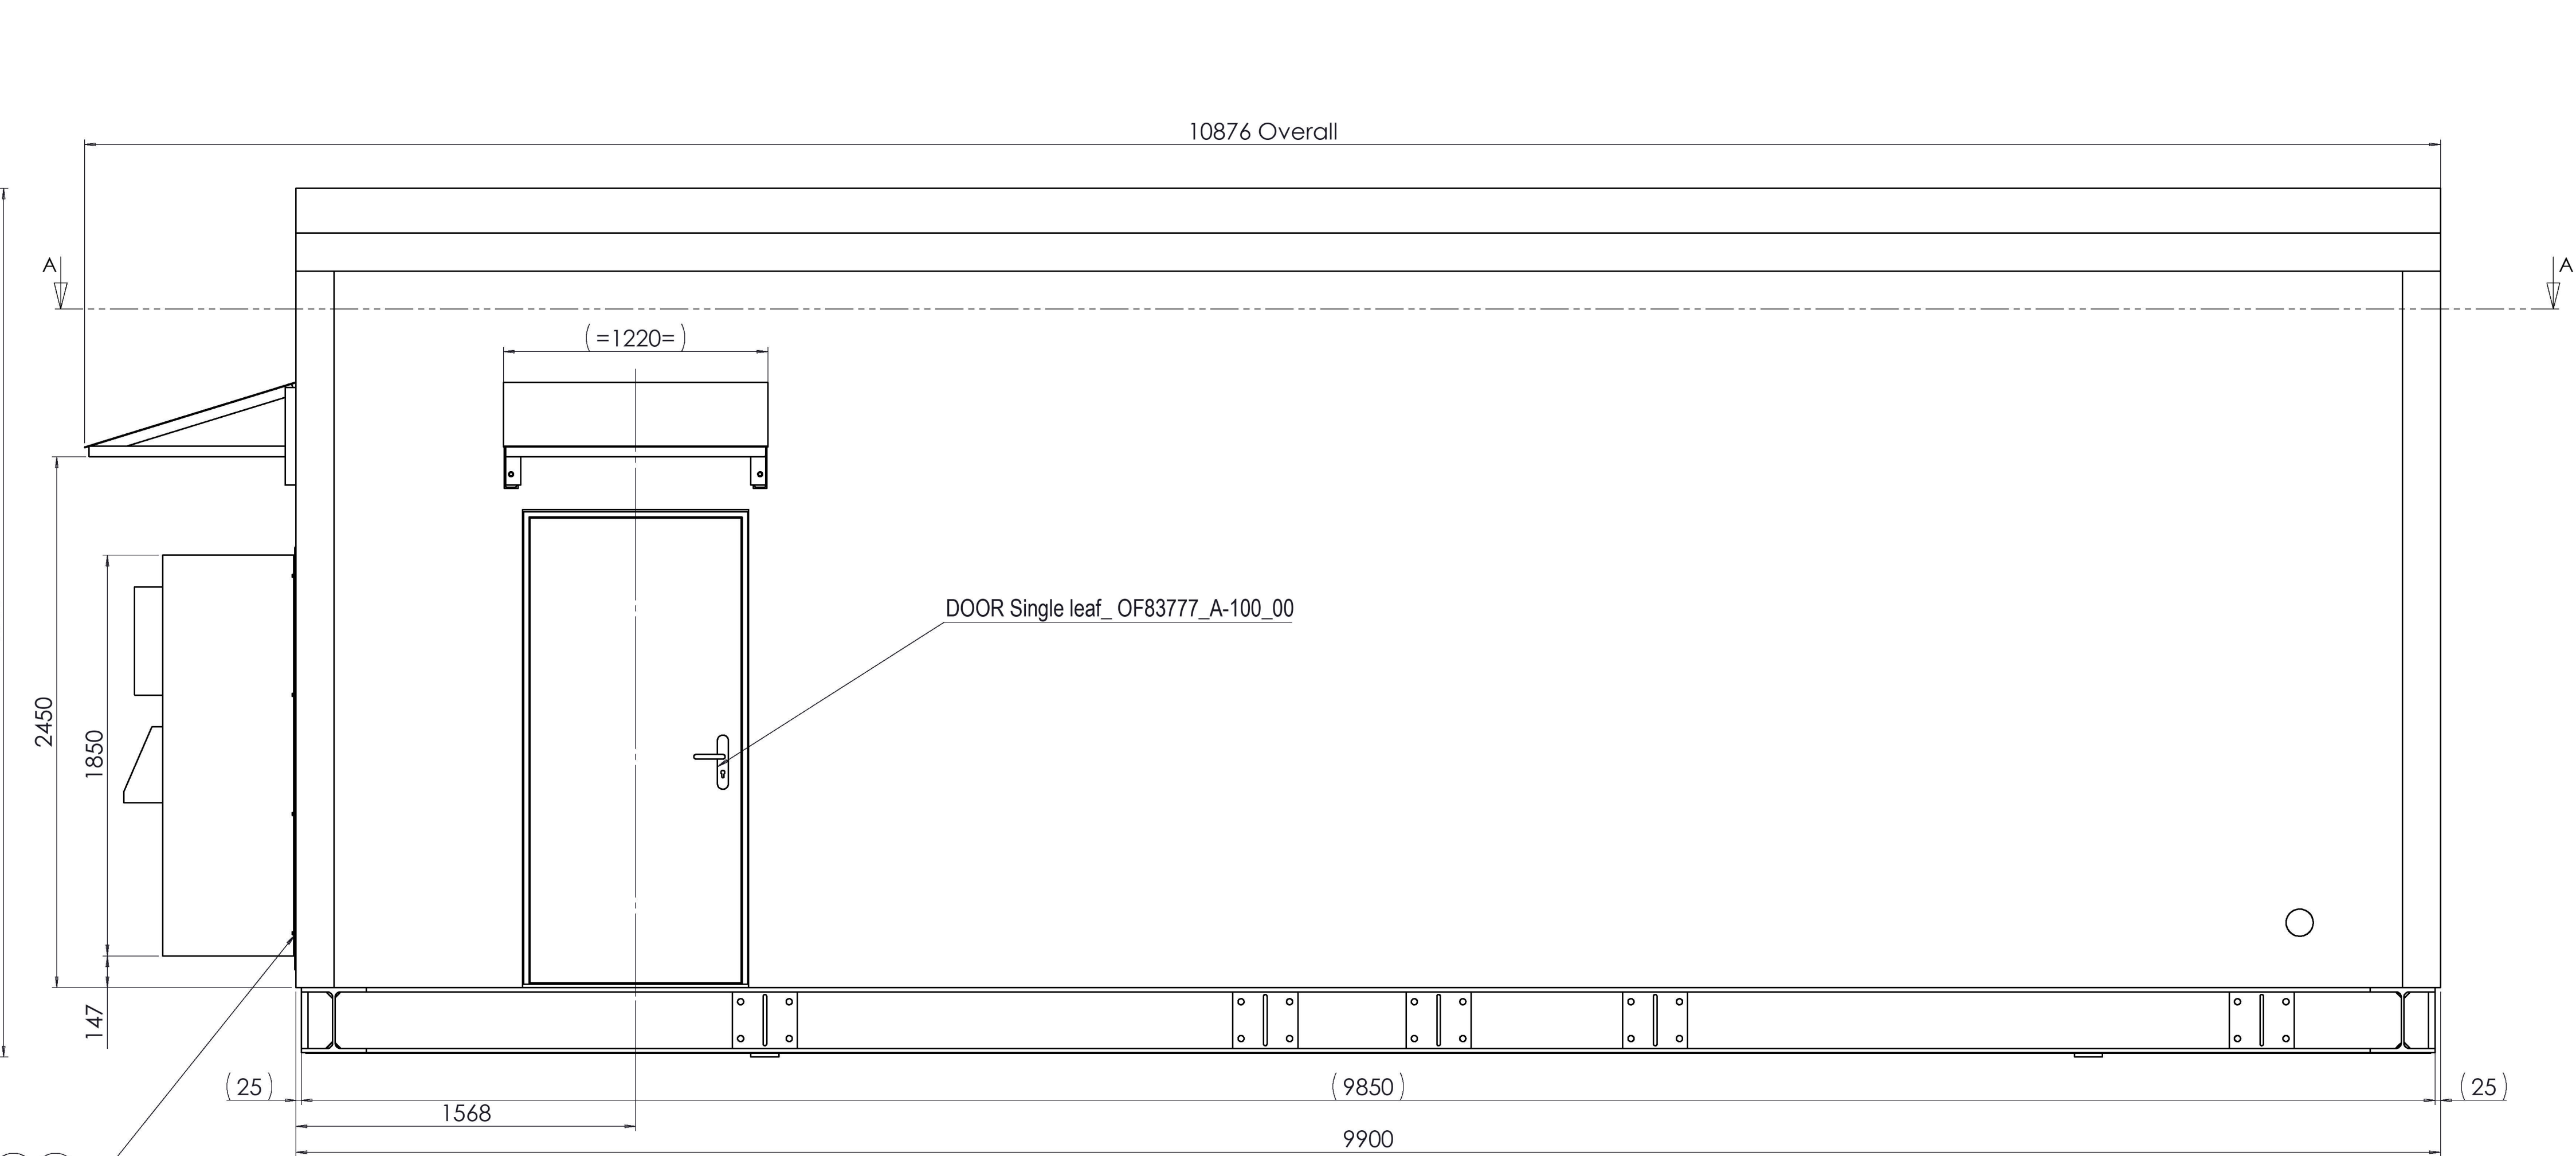

Soudure pleine pénétration ou soudure d'angle continue périphérique fermée tel que $a=0.7x$ epmín. / Full penetration weld or All-around fillet weld so that $a=0.7x$ min. thickness

Traitement / Treatment : EN-ISO12944-5, External structure C5, internal structure C3. High durability (between 15 & 25 years) - Color to be defined on project

NOMENCLATURE POUR / BILL OF MATERIAL FOR :						
1 ASSEMBLAGE GENERAL / MAIN ASSEMBLY						
REPÈRE / LABEL	DESIGNATION	TYPE	QUANTITE / QUANTITY	MATIERE / MATERIAL	NORME / STANDARD	
1	Welding assembly	2301-012-01-01	1	/	/	
2	Anchorage plate	2301-012-01-08	6	/	/	
3	Lifting plate	2301-012-01-09	8	/	/	
4	Canopy	2301-012-01-010	1	/	/	
5	Canopy HVAC	2301-012-01-011	1	/	/	
6	Screw	H M24x100	56	Grade 8.8	/	
7	Screw	H M10x30	8	Grade 8	/	
8	Screw	H 8x8	8	Grade 8.8	/	
9	Nut	M24	56	/	/	
10	Washer Grade M	D=24	88	Steel	/	DIN9340
11	Washer Grade M	D=24	24	Steel	/	
12	Washer Grade M	D=10	8	Steel	/	
13	Growler Washer	D=10	8	Steel	/	
14	Washer Grade M	D=8	8	Steel	/	
15	Growler Washer	D=8	8	Steel	/	

[illegible]